
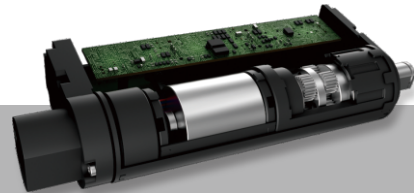


G40150

Rated Voltage	Rated Current	Working Temperature	Storage Temperature	Operating Life
24V DC/220V AC	0.12A	-10°C~50°C	-20°C~60°C	3000H min.

Length	Diameter	Nominal Power (W)	Reduction Ratio	Output Torque (Kgf.cm)	Output Speed (rpm)	Conveyer Displacement Velocity (m/s)
150mm	φ40	18 max	4	2	750	1.610
			6	4	500	1.073
			16	10	188	0.403
			36	22	83	0.179
			64	38	47	0.101
			96	58	31	0.067
			156	80	19	0.041

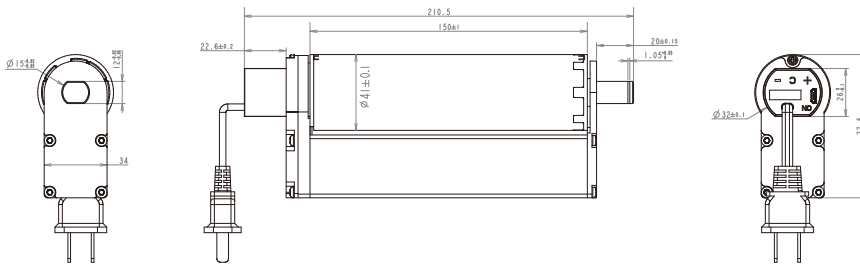

G50150

Rated Voltage	Rated Current	Working Temperature	Storage Temperature	Operating Life
24V DC/220V AC	0.12A	-10°C~50°C	-20°C~60°C	3000H min.

Length	Diameter	Nominal Power (W)	Reduction Ratio	Output Torque (Kgf.cm)	Output Speed (rpm)	Conveyer Displacement Velocity (m/s)
150mm	φ50	25max	4	2	750	1.610
			6	4	500	1.073
			16	10	188	0.403
			36	22	83	0.179
			64	38	47	0.101
			96	58	31	0.067
			156	94	19	0.041

