
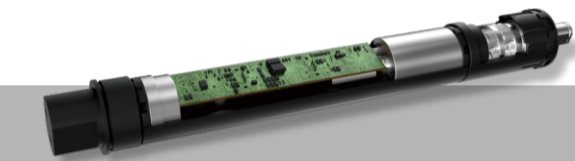




G40300

Rated Voltage	Rated Current	Working Temperature	Storage Temperature	Operating Life		
24V DC/220V AC	0.12A	-10°C~50°C	-20°C~60°C	3000H min.		
Length	Diameter	Nominal Power (W)	Reduction Ratio	Output Torque (Kgf.cm)	Output Speed (rpm)	Conveyer Displacement Velocity (m/s)
300mm	φ40	25max	4	2	750	1.610
			6	4	500	1.073
			16	10	188	0.403
			36	22	83	0.179
			64	38	47	0.101
			96	58	31	0.067
			156	80	19	0.041

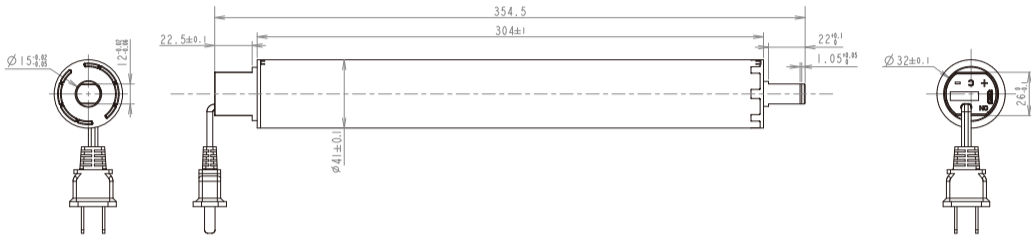

G50300

Rated Voltage	Rated Current	Working Temperature	Storage Temperature	Operating Life		
24V DC/220V AC	0.12A	-10°C~50°C	-20°C~60°C	3000H min.		
Length	Diameter	Nominal Power (W)	Reduction Ratio	Output Torque (Kgf.cm)	Output Speed (rpm)	Conveyer Displacement Velocity (m/s)
300mm	φ50	40max	4	5	750	1.610
			6	8	500	1.073
			16	21	188	0.403
			36	48	83	0.179
			64	85	47	0.101
			96	128	31	0.067
			156	150	19	0.041

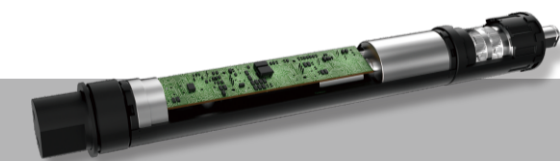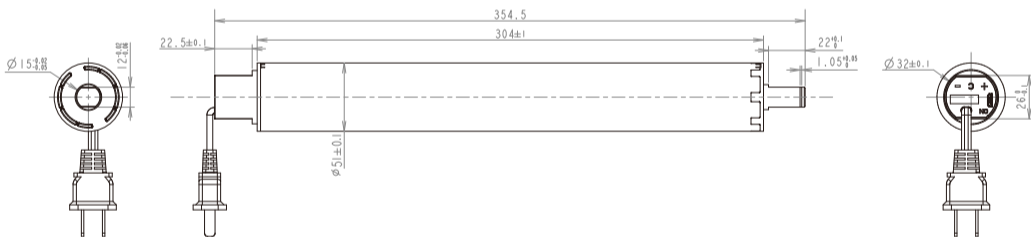

G60300

Rated Voltage	Rated Current	Working Temperature	Storage Temperature	Operating Life		
24V DC/220V AC	0.12A	-10°C~50°C	-20°C~60°C	3000H min.		
Length	Diameter	Nominal Power (W)	Reduction Ratio	Output Torque (Kgf.cm)	Output Speed (rpm)	Conveyer Displacement Velocity (m/s)
300mm	φ60	60max	4	8	750	1.610
			6	12	500	1.073
			16	32	188	0.403
			36	72	83	0.179
			64	128	47	0.101
			96	150	31	0.067
			156	150	19	0.041

