
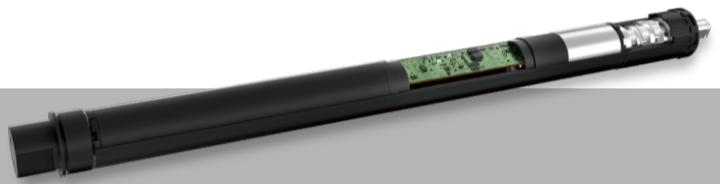




## G40500

Rated Voltage	Rated Current	Working Temperature	Storage Temperature	Operating Life		
24V DC/220V AC	0.12A	-10°C~50°C	-20°C~60°C	3000H min.		
Length	Diameter	Nominal Power (W)	Reduction Ratio	Output Torque (Kgf.cm)	Output Speed (rpm)	Conveyer Displacement Velocity (m/s)
500mm	φ40	25max	4	3	750	1.610
			6	5	500	1.073
			16	13	188	0.403
			36	30	83	0.179
			64	53	47	0.101
			96	80	31	0.067
			156	80	19	0.041

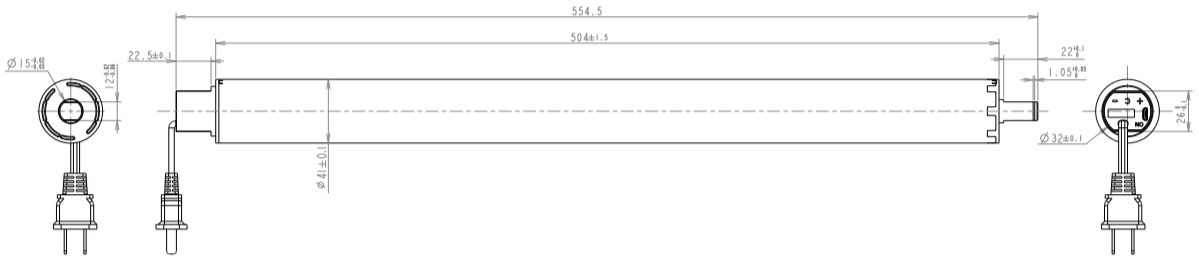

## G50500

Rated Voltage	Rated Current	Working Temperature	Storage Temperature	Operating Life		
24V DC/220V AC	0.12A	-10°C~50°C	-20°C~60°C	3000H min.		
Length	Diameter	Nominal Power (W)	Reduction Ratio	Output Torque (Kgf.cm)	Output Speed (rpm)	Conveyer Displacement Velocity (m/s)
500mm	φ50	40max	4	5	750	1.610
			6	8	500	1.073
			16	21	188	0.403
			36	48	83	0.179
			64	85	47	0.101
			96	128	31	0.067
			156	150	19	0.041

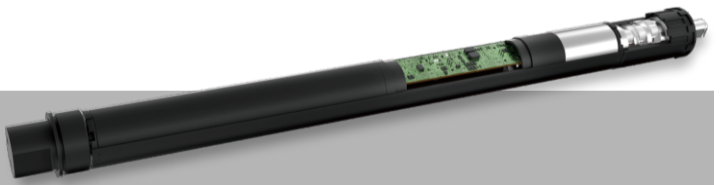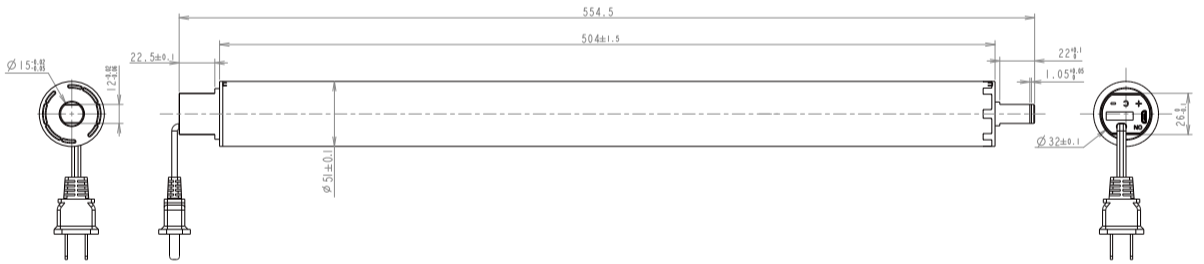

## G60500

Rated Voltage	Rated Current	Working Temperature	Storage Temperature	Operating Life		
24V DC/220V AC	0.12A	-10°C~50°C	-20°C~60°C	3000H min.		
Length	Diameter	Nominal Power (W)	Reduction Ratio	Output Torque (Kgf.cm)	Output Speed (rpm)	Conveyer Displacement Velocity (m/s)
500mm	φ60	60max	4	8	750	1.610
			6	12	500	1.073
			16	32	188	0.403
			36	72	83	0.179
			64	128	47	0.101
			96	150	31	0.067
			156	150	19	0.041

